


AVAILABLE RANGE CYLINDER

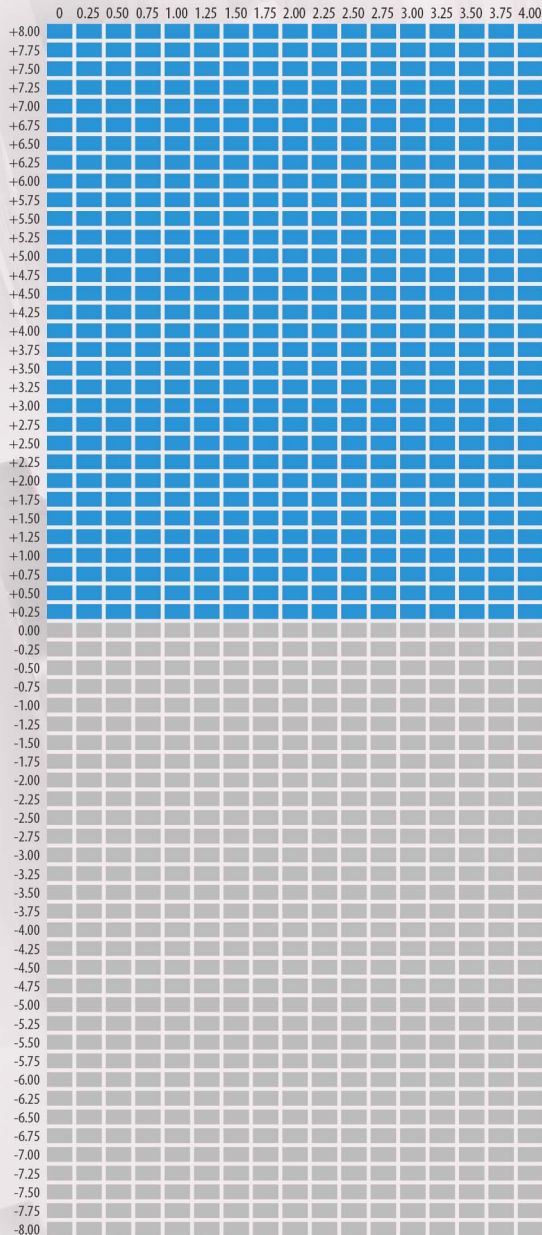

TECHNICAL INFORMATION

INDEX	LENS TYPE	ABBE VALUE	GRAVITY	UV LEVEL	DIAMETER	MATERIAL
1.56		38	1.28	380	60/55	KOC

COATING OPTIONS

HARD COATED	HARD COATED TINTABLE	HARD MULTI COATED	SUPER HYDROPHOBIC
HC	HCT	HMC	SUPER


ANTI-REFLEX COLOR AVAILABILITY



LENS COLOR AVAILABILITY



RANGE KEY AVAILABILITY

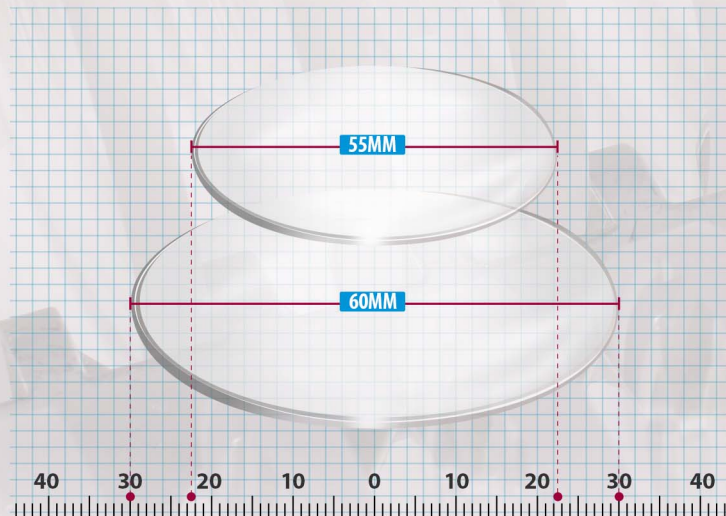

SPECIFICATION CHART

SPH Plus/ CYL Minus +55/60MM

SPH (+)	FRONT	BACK	E.T(mm)
0.25	2.25	2.00	1.60
0.50	2.50	2.00	1.60
0.75	2.75	2.00	1.40
1.00	3.00	2.00	1.40
1.25	3.25	2.00	1.20
1.50	3.50	2.00	1.20
1.75	3.75	2.00	1.20
2.00	4.00	2.00	1.20
2.25	3.00	0.75	1.20
2.50	3.25	0.75	1.20
2.75	3.50	0.75	1.20
3.00	3.75	0.75	1.20
3.25	4.00	0.75	0.50
3.50	4.25	0.75	0.50
3.75	4.50	0.75	0.50
4.00	4.75	0.75	0.50
4.25	5.00	0.75	0.50
4.50	5.25	0.75	0.50
4.75	5.50	0.75	0.50
5.00	5.75	0.75	0.50
5.25	6.00	0.75	0.50
5.50	6.25	0.75	0.50
5.75	6.50	0.75	0.50
6.00	6.75	0.75	0.50
6.25	7.00	0.75	0.50
6.50	7.25	0.75	0.50
6.75	7.50	0.75	0.50
7.00	7.75	0.75	0.50
7.25	8.00	0.75	0.50
7.50	8.25	0.75	0.50
7.75	8.50	0.75	0.50
8.00	8.75	0.75	0.50

