


### AVAILABLE RANGE CYLINDER

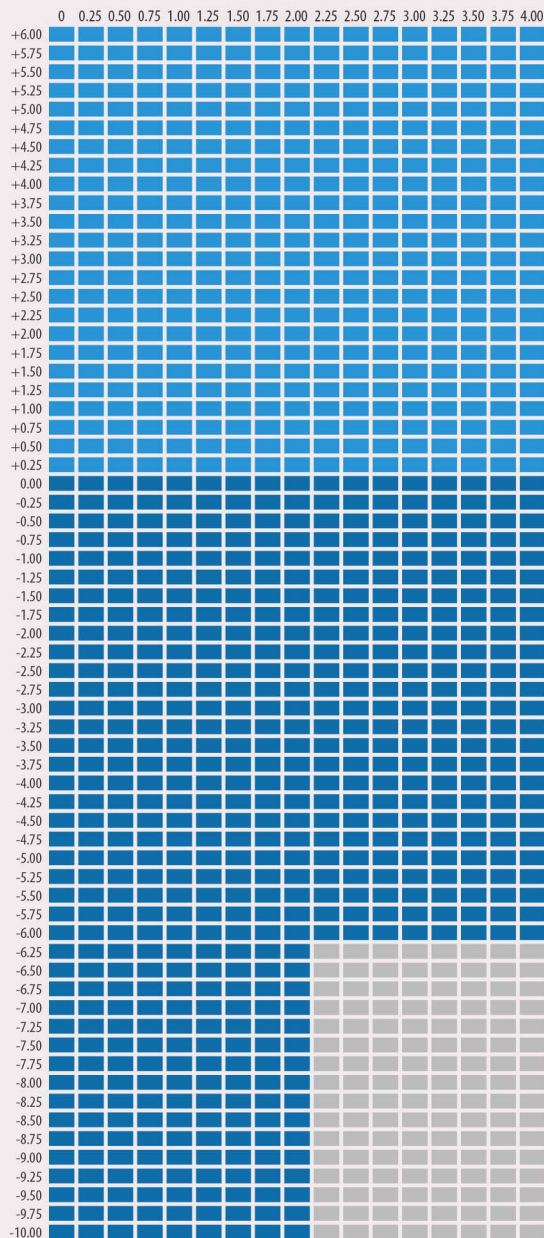

### TECHNICAL INFORMATION

INDEX	LENS TYPE	ABBE VALUE	GRAVITY	UV LEVEL	DIAMETER	MATERIAL
1.591		32	1.2	360	70/65	POLYCARBONATE

### COATING OPTIONS

HARD COATED	HARD COATED TINTABLE	HARD MULTI COATED	SUPER HYDROPHOBIC
HC	HCT	HMC	SUPER

### ANTI-REFLEX COLOR AVAILABILITY



GREEN

### LENS COLOR AVAILABILITY



CLEAR


### RANGE KEY AVAILABILITY



65MM



70MM

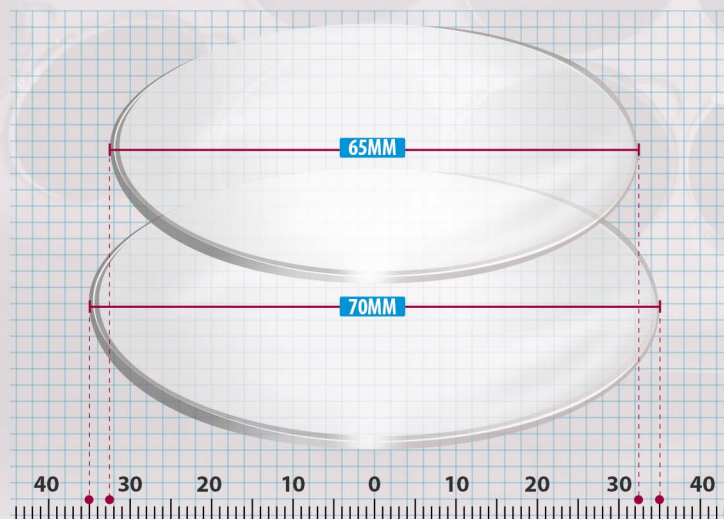

### SPECIFICATION CHART

SPH Minus / CYL Minus -70MM				SPH Plus / CYL Minus +65MM			
SPH (-)	FRONT	BACK	C.T.(mm)	SPH (+)	FRONT	BACK	E.T.(mm)
0.00	5.25	2.25	2.00	0.00	N/A	N/A	N/A
0.25	5.25	5.50	1.90	0.25	3.25	3.00	1.70
0.50	4.75	5.25	1.90	0.50	3.25	2.75	1.70
0.75	4.75	5.50	1.70	0.75	3.25	2.50	1.50
1.00	4.25	5.25	1.50	1.00	3.25	2.25	1.50
1.25	4.25	5.50	1.30	1.25	4.25	3.00	1.30
1.50	3.75	5.25	1.30	1.50	4.25	2.75	1.30
1.75	3.75	5.50	1.30	1.75	4.25	2.50	1.30
2.00	3.50	5.50	1.30	2.00	4.25	2.25	1.30
2.25	3.00	5.25	1.30	2.25	5.25	3.00	1.30
2.50	3.00	5.50	1.30	2.50	5.25	2.75	1.30
2.75	2.50	5.25	1.30	2.75	5.25	2.50	1.30
3.00	2.50	5.50	1.30	3.00	5.25	2.25	1.30
3.25	2.00	5.25	1.30	3.25	6.25	3.00	1.30
3.50	2.00	5.50	1.30	3.50	6.25	2.75	1.30
3.75	1.50	5.25	1.30	3.75	6.25	2.50	1.30
4.00	1.50	5.50	1.30	4.00	6.25	2.25	1.30
4.25	1.25	5.50	1.30	4.25	7.25	3.00	1.30
4.50	1.25	5.50	1.30	4.50	7.25	2.75	1.30
4.75	1.25	6.25	1.30	4.75	7.25	2.50	1.30
5.00	1.25	6.25	1.30	5.00	7.25	2.25	1.30
5.25	1.00	6.25	1.30	5.25	8.25	3.00	1.30
5.50	0.75	6.25	1.30	5.50	8.25	2.75	1.30
5.75	0.50	6.25	1.30	5.75	8.25	2.50	1.30
6.00	0.25	6.25	1.30	6.00	8.25	2.25	1.30
6.25	1.00	7.25	1.30				
6.50	1.00	7.50	1.30				
6.75	0.75	7.50	1.30				
7.00	0.50	7.50	1.30				
7.25	1.00	8.25	1.30				
7.50	0.75	8.25	1.30				
7.75	0.50	8.25	1.30				
8.00	0.25	8.25	1.30				
8.25	1.00	9.25	1.30				
8.50	0.75	9.25	1.30				
8.75	0.50	9.25	1.30				
9.00	0.25	9.25	1.30				
9.25	1.00	10.25	1.30				
9.50	0.75	10.25	1.30				
9.75	0.50	10.25	1.30				
10.00	0.25	10.25	1.30				